


DELUXE GAS 900MM



- Colour:** Stainless Steel
- Model:** ICD9SG4
- Dimensions:** 860mm (L) x 510mm (W) x 30mm (D)
- Cut Cut Size:** 820mm (L) x 490mm (W) x 32mm (D)
- Packaging:** Carton Size 91cm (L) x 56cm (W) x 14cm (D)
 Carton Cubic metres 0.071 cubic metres
 Carton Weight 15.05 Kg

Electrical Connection: The appliance is supplied with a 100cm long flexible supply lead. The point of attachment is located at the rear underside of the appliance.

Burners	Gas	Diameter Injectors	Operating Pressure	Burner Rating(Mj)
Front Right	Propane	0.65	2.75	6.0
	Natural	1.10	1.00	6.3
Back Right	Propane	0.85	2.75	10.0
	Natural	1.55	1.00	11.5
Front Left	Propane	0.52	2.75	3.6
	Natural	0.80	1.00	3.6
Back Left	Propane	0.65	2.75	6.0
	Natural	1.10	1.00	6.3
Triple Crown Wok Burner	Propane	0.95	2.75	13.0
	Natural	1.60	1.00	13.0

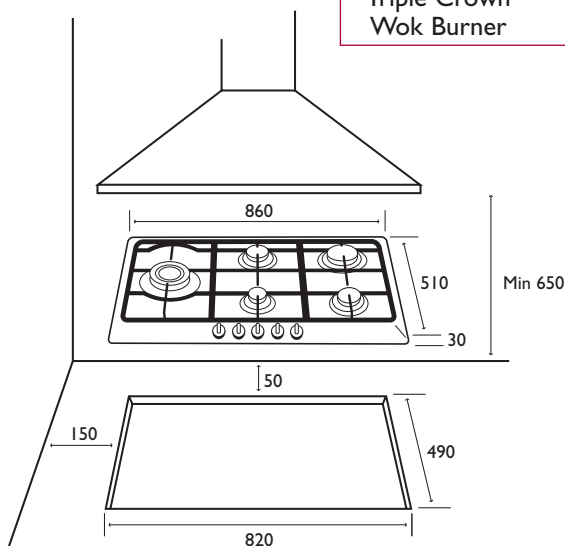

Other:

- Suitable for natural gas, LPG & town gas – LPG jets come with appliance
- A.G.A. Approval
- Gas entry point at rear left underside of appliance

Method of Installation:

- Cut benchtop to dimensions as shown.
- Position the special sealed gasket (provided) on the edge of the cooktop making sure that the ends meet without one lying on top of the other.
- Put the cooktop in the unit opening making sure that it is centred.
- Fasten the hob to the unit with the fastening brackets. The traction of the screws will be enough to cut the sealing gasket so that the excess can easily be removed.